



78450 GLOBAL DEEP CYCLE L16G(6V390/C20)





Dual

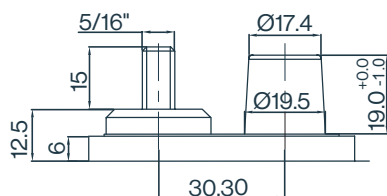

Positive



Negative

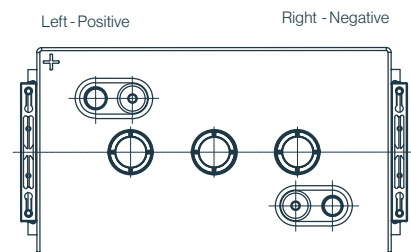

Electrical Specifications

C5 Capacity	320Ah
C20 Capacity	390Ah
Voltage	6V
80% DOD Voltage Cutoff	5.6V
Self Discharge	Less than 3% per month (20°C)
Charge Temperature	Min: -10°C / Max: 50°C
Discharge Temperature**	Min: -40°C / Max: 50°C
Storage	Min: -20°C / Max: 60°C

Mechanical Specifications

Industry Reference	-
Length (A)	308 mm
Width (B)	174 mm
Height (C)	388 mm
Height (D)	416 mm
Weight	48 kgs
Terminal (Opt'l)	Dual
Cell(s)	3
Electrolyte	Flooded
Terminal Torque Nm	8

NOTE: There is a tolerance of +/-2%.

General Features

- Flooded bloc batteries
- Good high current performance for extreme operating conditions
- 1000 cycles (IEC 60254)
- Recyclable
- Long cycle life
- Low self discharge rate

Applications

- Cleaning Machines
- Aerial Platforms & Lifters
- Pallet Trucks
- Golf Carts

Compliant with IEC 60254