



78920 GLOBAL DEEP CYCLE L-105(6V225/C20)



Specifications

Item	Specifications	
Voltage	6V	
Dimension	Length	260mm
	Width	180mm
	Container Height	248mm
	Total Height	279.5mm
Approx Weight	28.6kg	
Terminal	DT-M8(A)	
Container Material	PP	
Rated Capacity	20HR	225Ah
	5HR	185Ah
Reserve Capacity	25A	445min
	75A	115min

Layout

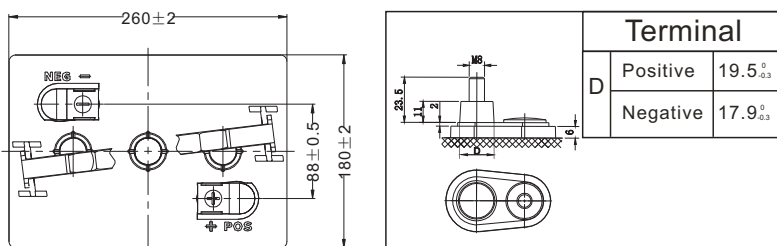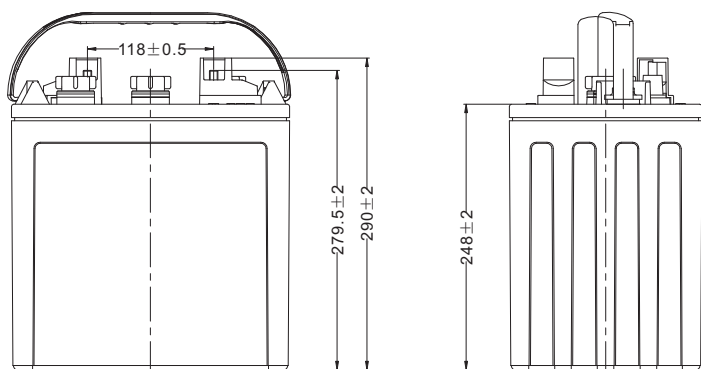

Terminal		
D	Positive	19.5 ^{+0.3} _{-0.3}
	Negative	17.9 ^{+0.3} _{-0.3}


General Features

- Long cycle service life, strong recovery ability of deep discharge
- Low risk of thermal runaway, easy maintenance
- High energy, low internal resistance, low self-discharge
- Reliable sealing structure ensures no leakage during use
- Special design and structure increase battery performance
- The special alloy improves the corrosion resistance of the plate increases the service life and good deep discharge performance

Applications

- Electric vehicle
- Golf cart
- Sightseeing bus
- Cleaning equipment
- AWP
- Marine&RV

Charging Characteristics

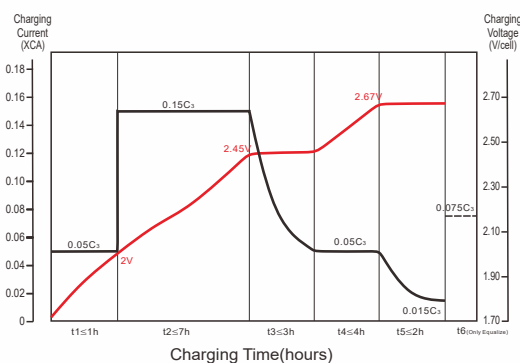

Discharge Characteristics

