

98980 GLOBAL DEEP CYCLE AGM L-875 AGM(8V182C20)



General Features

- True deep cycle AGM technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate
- Carbon active material
- Electrolyte for longer cycle life
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration :long cycle life &High energy density and super anti-vibration design
- Low self-discharge for longer shelf life

Electrical Specifications

Voltage (V)	Capacity(Ah)					Reserve Capacity(min)		
	100HR	20HR	10HR	5HR	3HR	25A	56A	75A
8	200	182	170	153	135	365	155	/

Mechanical Specifications

Dimensions(mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
Length	Width	Height	Total Height			
260	180	252	274	30.8	DT(5/16")	PP

Operating Temperature Range		
Discharge	Charge	Storage
-20°C~55°C	0°C~40°C	-15°C~40°C




IATF16949

ISO14001

ISO9001

98980 GLOBAL DEEP CYCLE AGM L-875 AGM(8V182C20)


Layout

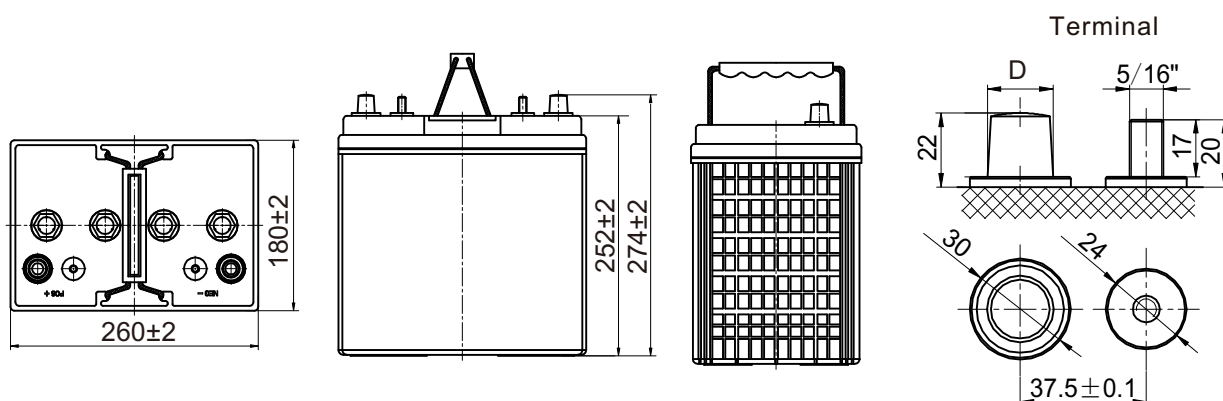


Note: D: Positive $19.5_{-0.3}^0$, D: Negative $17.9_{-0.3}^0$; Terminal Torque Values in-lb(Nm): 176-203(20-23)

Performance Characteristics


Charging Profile

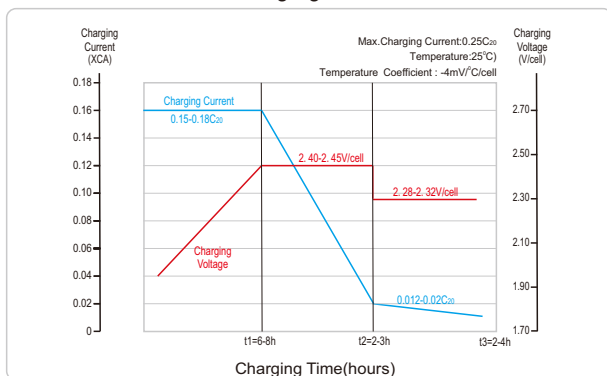

Relationship of OCV and State Of Charge(25°C)

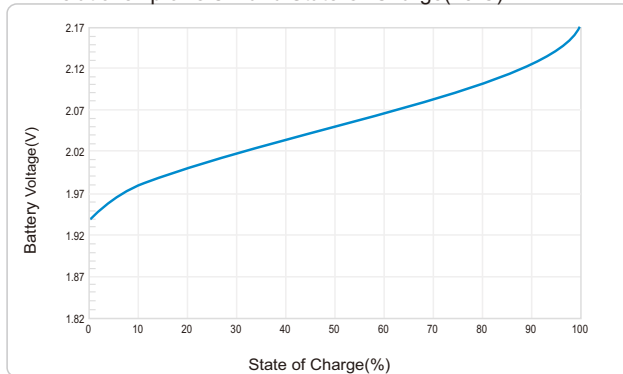

Cycle Life in Relation to Depth Of Discharge

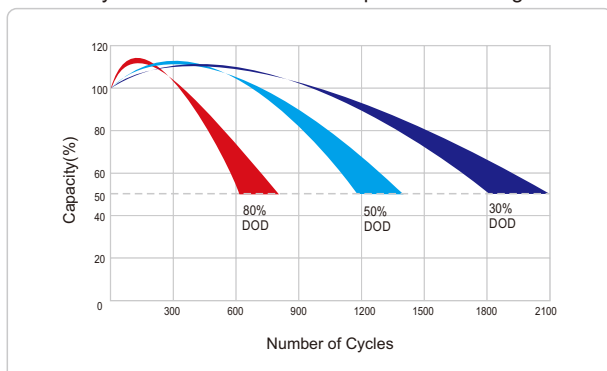

Self-discharge Characteristic

